



Test Report: HLG-240H-C1750

250W Single Output LED Power Supply

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test

■ RELIABILITY TEST



ENVIRONMENT TEST

DESIGN VERIFY TEST



OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	CURRENT TOLERANCE	±5%	I/P: 230 VAC I/P: 115VAC O/P: FULL LOAD Ta: 25°C	1.753A / 230VAC @ CV MAX-2V 1.754A / 230VAC @ CV MIN 1.753A / 115VAC @ CV MAX-2V 1.754A / 115VAC @ CV MIN +0.23%
2	CONSTANT CURRENT REGION	CH1: 71V~ 143V	I/P: 230 VAC O/P: FULL LOAD Ta: 25°C	60V~ 142V / 230VAC
3	OPEN CIRCUIT VOLTAGE (max.)	146V	I/P: 230 VAC O/P: NO LOAD Ta: 25°C	143.5V
4	CURRENT ADJ. RANGE	CH1: 875mA~ 1750mA	I/P: 230 VAC I/P: 115VAC O/P: CV MIN & CV MAX-2V Ta: 25°C	646mA~ 1953mA / 230VAC @ CV MAX-2V 646mA~ 1949mA / 230VAC @ CV MIN 645mA~ 1954mA / 115VAC @ CV MAX-2V 646mA~ 1949mA / 115VAC @ CV MIN
5	CURRENT RIPPLE	5.0% max. @ rated current	I/P: 230 VAC O/P: FULL LOAD Ta: 25°C	1.45%
6	SET UP TIME(Max)	230VAC/500 ms 115VAC/1000ms	I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta: 25°C	230VAC/ 218ms 115 VAC/ 312ms
<div style="display: flex; justify-content: space-around;"> <div style="width: 45%;"> <p>INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH2: AC Input Voltage</p> <p>5 May 2015 14:57:28</p> </div> <div style="width: 45%;"> <p>INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage</p> <p>5 May 2015 14:59:32</p> </div> </div>				
7	DIMMING OPERATION (for B-Type)	<p>※3 in 1 dimming function</p> <p>※Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-: 1 ~ 10VDC, or 10V PWM signal or resistance.</p> <p>※Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.</p> <p>※Dimming source current from power supply: 100μ A (typ.)</p>		



© Applying additive 1 ~ 10VDC

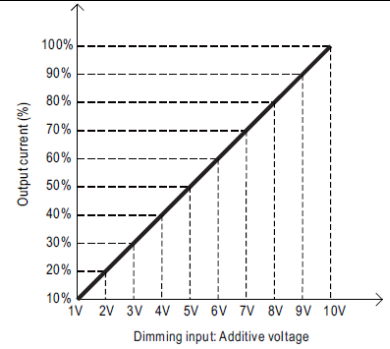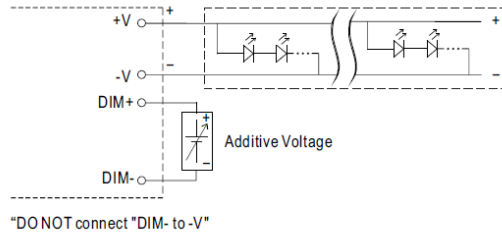


© Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):

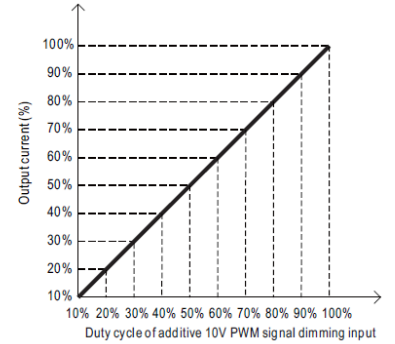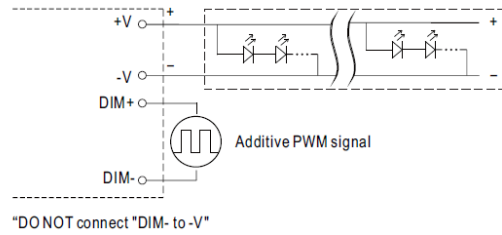

© Applying additive resistance:

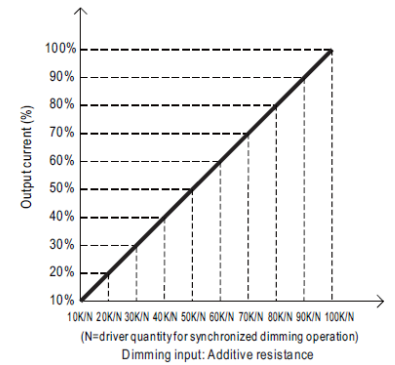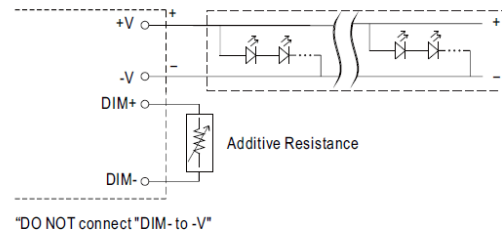

Note: In the case of turning the lighting fixture down to 0% brightness, please refer to the configuration as follow, or please contact MEAN WELL for other options.

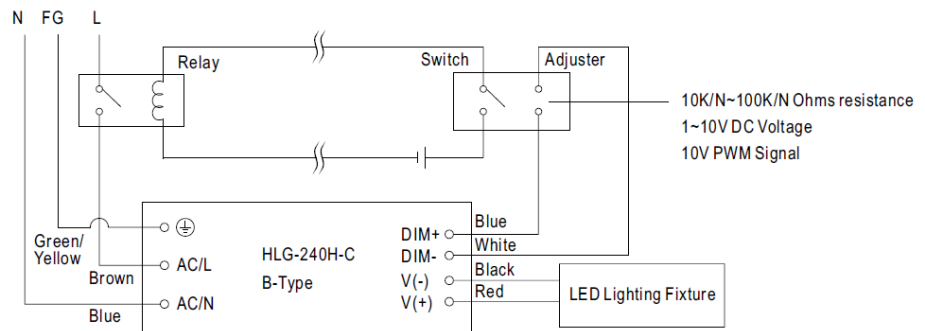

Using a switch and relay can turn ON/OFF the lighting fixture.

I/P : 230VAC

O/P : DIMMING TEST

TA : 25°C

R	10K	20K	30K	40K	50K	60K	70K	80K	90K	100K	OPEN
O/P CURRENT	0.178A	0.354A	0.534A	0.712A	0.891A	1.071A	1.245A	1.422A	1.618A	1.752A	1.761A
%	10.17%	20.23%	30.51%	40.69%	50.91%	61.20%	71.14%	81.26%	92.46%	100.11%	100.63%
V	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	OPEN

O/P CURRENT	0.178A	0.362A	0.547A	0.725A	0.888A	1.066A	1.244A	1.423A	1.592A	1.750A	1.749A
%	10.17%	20.69%	31.26%	41.43%	50.74%	60.91%	71.09%	81.31%	90.97%	100.00%	99.91%
PWM (100HZ)	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN
O/P CURRENT	0.177A	0.335A	0.528A	0.703A	0.879A	1.053A	1.227A	1.401A	1.575A	1.750A	1.751A
%	10.11%	19.15%	30.17%	40.17%	50.23%	60.17%	70.11%	80.06%	90.00%	100.00%	100.06%


TEST RESULT : OK

8 DIMMING OPERATION (for Dxx-Type by User definition)

※Smart timer dimming function (for Dxx-Type by User definition)

MEAN WELL Smart timer dimming primarily provides the adaptive proportion dimming profile for the output constant current level to perform up to 14 consecutive hours. 3 dimming profiles hereunder are defined accounting for the most frequently seen applications. If other options may be needed, please contact MEAN WELL for details.


Ex : D01-Type: the profile recommended for residential lighting

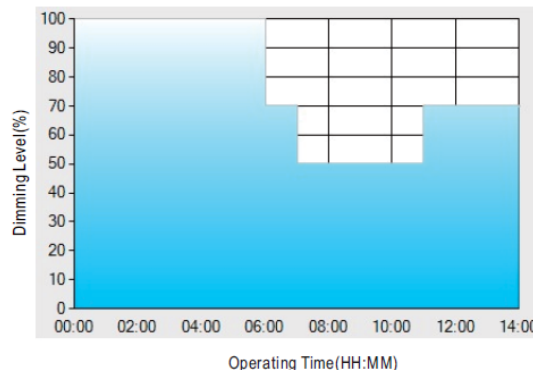

Set up for D01-Type in Smart timer dimming software program:

	T1	T2	T3	T4
TIME**	06:00	07:00	11:00	--
LEVEL**	100%	70%	50%	70%


Ex : D02-Type: the profile recommended for street lighting

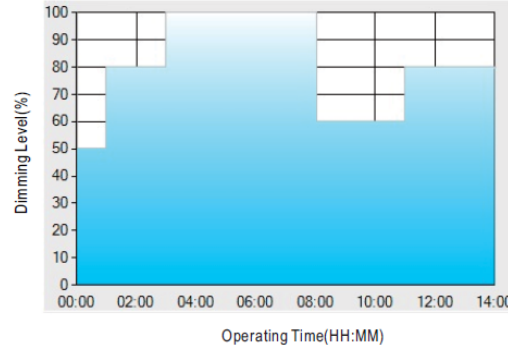

Set up for D02-Type in Smart timer dimming software program:

	T1	T2	T3	T4	T5
TIME**	01:00	03:00	8:00	11:00	--
LEVEL**	50%	80%	100%	60%	80%

Ex : D03-Type: the profile recommended for tunnel lighting

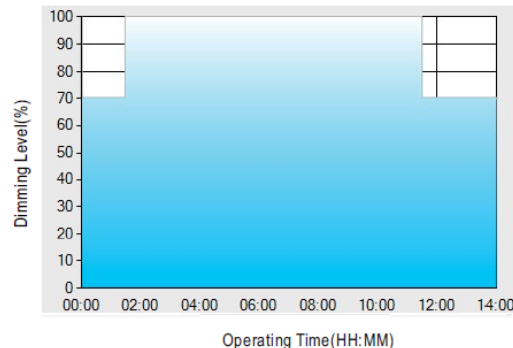


Set up for D03-Type in Smart timer dimming software program:

	T1	T2	T3
TIME**	01:30	11:00	--
LEVEL**	70%	100%	70%

I/P : 230VAC
O/P : DIMMING TEST
TA : 25°C
TEST RESULT : OK


INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																										
1	INPUT VOLTAGE RANGE	90VAC~305 VAC	I/P:TESTING O/P:FULL LOAD Ta:25°C	70V~305V																																										
			I/P: (1)LOW-LINE-3V=87 V HIGH-LINE+10V=315 V O/P:FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec . OFF: 30 Sec 10MIN (POWER ON/OFF NO DAMAGE) (2) I/P:230Vac ON: 0.5 Sec . OFF: 0.5 Sec 20MIN	(1).TEST:OK (2).TEST :OK																																										
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P: 110 VAC ~305VAC O/P:FULL~MIN LOAD Ta:25°C	OK																																										
3	INPUT CURRENT (TYP)	277VAC/ 1.1 A 230 VAC/ 1.3 A 115 VAC/ 2.5 A	I/P: 277VAC/230 VAC/115 VAC O/P:FULL LOAD Ta:25°C	I= 1.000A/277VAC I = 1.173A/230VAC I = 2.401A/115VAC																																										
4	POWER FACTOR(TYP)	0.95/230 VAC FULL LOAD 0.98/115 VAC FULL LOAD 0.92/277 VAC FULL LOAD	I/P: 230 VAC/115VAC/277VAC O/P:FULL LOAD Ta:25°C	PF=0.9825 /230V/100%LOAD PF=0.9961/115V/100%LOAD PF=0.9488 /277V/100%LOAD																																										
			<p style="text-align: center;">P.F vs LOAD</p> <table border="1"> <caption>P.F vs LOAD Data</caption> <thead> <tr> <th>Load (%)</th> <th>230V P.F</th> <th>115V P.F</th> <th>277V P.F</th> </tr> </thead> <tbody> <tr><td>10%</td><td>0.58</td><td>0.90</td><td>0.40</td></tr> <tr><td>20%</td><td>0.78</td><td>0.95</td><td>0.60</td></tr> <tr><td>30%</td><td>0.88</td><td>0.97</td><td>0.73</td></tr> <tr><td>40%</td><td>0.92</td><td>0.98</td><td>0.80</td></tr> <tr><td>50%</td><td>0.95</td><td>0.99</td><td>0.86</td></tr> <tr><td>60%</td><td>0.96</td><td>0.99</td><td>0.89</td></tr> <tr><td>70%</td><td>0.97</td><td>0.99</td><td>0.91</td></tr> <tr><td>80%</td><td>0.97</td><td>0.99</td><td>0.93</td></tr> <tr><td>90%</td><td>0.98</td><td>0.99</td><td>0.94</td></tr> <tr><td>100%</td><td>0.98</td><td>1.00</td><td>0.95</td></tr> </tbody> </table>			Load (%)	230V P.F	115V P.F	277V P.F	10%	0.58	0.90	0.40	20%	0.78	0.95	0.60	30%	0.88	0.97	0.73	40%	0.92	0.98	0.80	50%	0.95	0.99	0.86	60%	0.96	0.99	0.89	70%	0.97	0.99	0.91	80%	0.97	0.99	0.93	90%	0.98	0.99	0.94	100%
Load (%)	230V P.F	115V P.F	277V P.F																																											
10%	0.58	0.90	0.40																																											
20%	0.78	0.95	0.60																																											
30%	0.88	0.97	0.73																																											
40%	0.92	0.98	0.80																																											
50%	0.95	0.99	0.86																																											
60%	0.96	0.99	0.89																																											
70%	0.97	0.99	0.91																																											
80%	0.97	0.99	0.93																																											
90%	0.98	0.99	0.94																																											
100%	0.98	1.00	0.95																																											
5	EFFICIENCY (TYP)	94 %	I/P: 230 VAC O/P:FULL LOAD Ta:25°C	94.2%																																										
			EFFICIENCY vs LOAD																																											

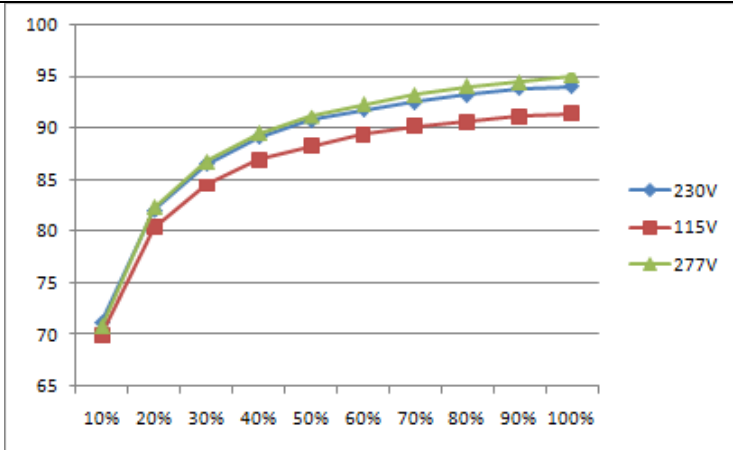


6	TOTAL HARMONIC DISTORTION	<p>Total harmonic distortion will be lower than 20% when output loading is 50% or higher at 230VAC / 115VAC</p> <p>Total harmonic distortion will be lower than 20% when output loading is 75% or higher at 277VAC</p>	<p>I/P : 230VAC</p> <p>I/P : 115VAC</p> <p>O/P : 50% LOAD</p> <p>Ta : 25°C</p>	<p>THD : 5.2732 %</p> <p>THD : 4.0143 %</p>
			<p>I/P : 277VAC</p> <p>O/P : 75% LOAD</p> <p>Ta : 25°C</p>	<p>THD : 6.6690 %</p>

THD&LOAD

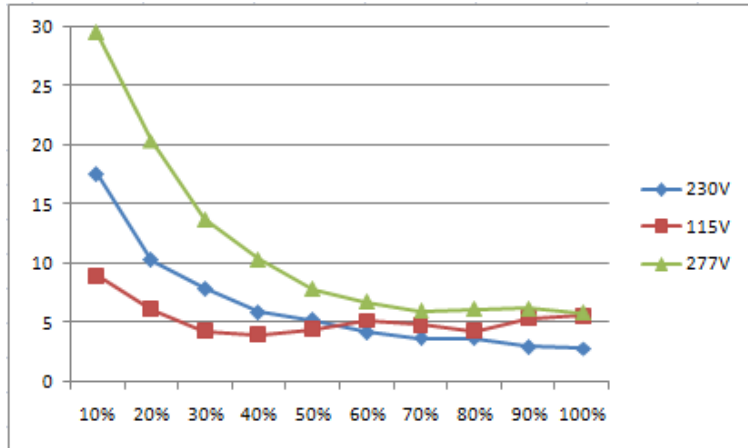

7	INRUSH CURRENT (TYP)	<p>230 V / 75A</p> <p>COLD START</p> <p>(twidth=700us measured at 50% Ipeak) COLD START</p>	<p>I/P: 230 VAC</p> <p>O/P: FULL LOAD</p> <p>Ta: 25°C</p>	<p>I = 61.7 A / 230VAC</p> <p>T50= 584 us</p>
---	----------------------	---	---	---

INPUT=230VAC/50HZ @ FULL LOAD
 CH2 : AC Input Voltage CH4 : Input current (1V=1A)

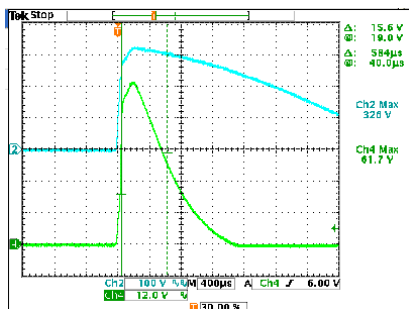

ROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER VOLTAGE PROTECTION	V1: 150V~ 165V	I/P: 305VAC I/P: 230VAC I/P: 90VAC O/P:MIN LOAD Ta:25°C	157.93V/ 305VAC 156.72V/ 230VAC 156.70V/ 90VAC PROTECTION TYPE : Shut down and latch off o/p voltage, re-power on to recover
2	OVER TEMPERATURE PROTECTION	PROTECTION TYPE : Shut down o/p voltage, recovers automatically after temperature goes down	I/P: 305 VAC I/P: 90 VAC O/P:FULL LOAD	O.T.P. Active PROTECTION TYPE : Shut down o/p voltage, recovers automatically after temperature goes down
3	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 305VAC I/P: 90 VAC O/P: FULL LOAD Ta:25°C	NO DAMAGE PROTECTION TYPE : Constant current limiting, recovers automatically after fault condition is removed

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	P.F.C Transistor (D to S) or (C to E) Peak Voltage	Q1 Rated 600V/19A	I/P:High-Line +3V =308V AC ON/OFF VDS: O/P: (1)Full Load (2)Output Short (3)FULL LOAD CONTINUE I/P:Low-Line -3V = 107V AC ON/OFF VDS O/P: (1)Full Load (2)Output Short (3)FULL LOAD CONTINUE Ta:25°C	VDS: (1)501V (2)466V (3)506V VDS: (1)514V (2)466V (3)512V
2	PWM Transistor (D to S) or (C to E) Peak Voltage	Q3 Rated 20A/600V	I/P:High-Line +3V =308V AC ON/OFF VDS: O/P: (1)Full Load (2)Output Short (3)FULL LOAD CONTINUE I/P:Low-Line -3V =107V AC ON/OFF VDS O/P: (1)Full Load (2)Output Short (3)FULL LOAD CONTINUE Ta:25°C	VDS: (1)535V (2)490V (3)442V VDS: (1)470V (2)465V (3)456V

3	Diode Peak Voltage	D102 Rated 10A/400V	I/P:High-Line +3V = 308 V AC ON/OFF VDS: O/P: (1)Full Load (2)Output Short (3)FULL LOAD CONTINUE	D102: VDS: (1)316V (2)31V (3)314V
		D103 Rated 10A/400V	VDS: (1)Full Load (2)Output Short (3)FULL LOAD CONTINUE Ta:25°C	D103: VDS: (1)323V (2)36.8V (3)319V
4	Input Capacitor Voltage	C5 Rated: 150u/450V SURGE POWER :495V	I/P:High-Line +3V =308 V O/P: (1)Full Load input on/off (2) Min load input on /Off (3)Full Load /Min load Change Ta:25°C	(1)444V (2)454V (3)446V
5	Control IC Voltage Test	PWM IC U70 Rated 8.85V~16V	I/P:High-Line +3V =308 V AC ON/OFF O/P:(1)FULL LOAD (2) Output Short (3)O.L.P (4)O.V.P. (5)NO (LOW LINE) Ta:25°C	(1) 15.3V (2) 14.6V (3) 14.7V (4) 15.3V (5) 15.2V

SAFETY & EMC TEST

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	IEC60950-1 I/P-O/P: 3.75KVAC/min I/P-FG: 2 KVAC/min<4.5mA O/P-FG:1.5KVAC/min	I/P-O/P: 4.125 KVAC/min I/P-FG: 2.4 KVAC/min O/P-FG: 1.8 KVAC/min Ta:25°C	I/P-O/P:4.05 mA I/P-FG: 4.16mA O/P-FG:3.51 mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100MΩ I/P-FG: 500VDC>100MΩ O/P-FG:500VDC>100MΩ	I/P-O/P: 500 VDC I/P-FG: 500 VDC O/P-FG: 500 VDC Ta:25°C	I/P-O/P:15.5 GΩ I/P-FG: 7.4G Ω O/P-FG: 30G Ω NO DAMAGE
3	GROUNDING CONTINUITY	IEC60950-1 FG(PE) TO CHASSIS OR TRACE < 100 mΩ	40A / 2min Ta:25°C	30 mΩ
4	LEAKAGE CURRENT	IEC60950-1 < 0.75mA / 277VAC	I/P: 277 VAC O/P:Min LOAD Ta:25°C	L-FG:0.33 mA N-FG:0.33 mA

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS A CLASS C	I/P: 230VAC/50HZ O/P:FULL LOAD Ta:25°C	PASS
2	CONDUCTION	EN55015 CLASS B	I/P: 230 VAC (50HZ) O/P:FULL/50% LOAD Ta:25°C	PASS Test by certified Lab

3	RADIATION	EN55015 CLASS B	I/P: 230 VAC (50HZ) O/P:FULL LOAD Ta:25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 LIGHT INDUSTRY AIR:8KV / Contact:4KV	I/P: 230 VAC/50HZ O/P:FULL LOAD Ta:25°C	CRITERIA A
5	E.F.T	EN61000-4-4 INDUSTRY INPUT: 2KV	I/P: 230 VAC/50HZ O/P:FULL LOAD Ta:25°C	CRITERIA A
6	SURGE	IEC61000-4-5 INDUSTRY L-N :2KV L,N-PE:4KV	I/P: 230 VAC/50HZ O/P:FULL LOAD Ta:25°C	CRITERIA A
7	Test by certified Lab & Test Report Prepare. Any contradictions of the test results, please refer to the latest EMC test report.			

■ RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																																																
1	TEMPERATURE RISE TEST	MODEL : HLG-240H-C1400 1. ROOM AMBIENT BURN-IN : 3 HRS I/P : 230VAC O/P : FULL LOAD Ta= 29.2 °C 2. HIGH AMBIENT BURN-IN : 6 HRS I/P : 230VAC O/P : FULL LOAD Ta= 55.7 °C																																																																																		
				<table border="1"> <thead> <tr> <th>NO</th> <th>Position</th> <th>ROOM AMBIENT</th> <th>HIGH AMBIENT</th> </tr> </thead> <tbody> <tr><td>1</td><td>BD1</td><td>71.7°C</td><td>94.1°C</td></tr> <tr><td>2</td><td>C14</td><td>69.7°C</td><td>92.2°C</td></tr> <tr><td>3</td><td>LF2</td><td>67.8°C</td><td>89.8°C</td></tr> <tr><td>4</td><td>Q1</td><td>71.3°C</td><td>94.1°C</td></tr> <tr><td>5</td><td>D3</td><td>713.0°C</td><td>93.9°C</td></tr> <tr><td>6</td><td>L2</td><td>70.1°C</td><td>92.4°C</td></tr> <tr><td>7</td><td>L1</td><td>71.9°C</td><td>94.1°C</td></tr> <tr><td>8</td><td>D2</td><td>71.0°C</td><td>93.5°C</td></tr> <tr><td>9</td><td>TSW1</td><td>68.6°C</td><td>90.9°C</td></tr> <tr><td>10</td><td>Q3</td><td>70.1°C</td><td>92.4°C</td></tr> <tr><td>11</td><td>C5</td><td>67.3°C</td><td>89.8°C</td></tr> <tr><td>12</td><td>C35</td><td>70.0°C</td><td>92.6°C</td></tr> <tr><td>13</td><td>C37</td><td>70.0°C</td><td>92.6°C</td></tr> <tr><td>14</td><td>D102</td><td>72.2°C</td><td>94.4°C</td></tr> <tr><td>15</td><td>T1</td><td>90.3°C</td><td>111.5°C</td></tr> <tr><td>16</td><td>C201</td><td>70.9°C</td><td>93.2°C</td></tr> <tr><td>17</td><td>C102</td><td>69.4°C</td><td>91.8°C</td></tr> <tr><td>18</td><td>U1</td><td>69.3°C</td><td>91.6°C</td></tr> <tr><td>19</td><td>U201</td><td>74.3°C</td><td>96.8°C</td></tr> </tbody> </table>	NO	Position	ROOM AMBIENT	HIGH AMBIENT	1	BD1	71.7°C	94.1°C	2	C14	69.7°C	92.2°C	3	LF2	67.8°C	89.8°C	4	Q1	71.3°C	94.1°C	5	D3	713.0°C	93.9°C	6	L2	70.1°C	92.4°C	7	L1	71.9°C	94.1°C	8	D2	71.0°C	93.5°C	9	TSW1	68.6°C	90.9°C	10	Q3	70.1°C	92.4°C	11	C5	67.3°C	89.8°C	12	C35	70.0°C	92.6°C	13	C37	70.0°C	92.6°C	14	D102	72.2°C	94.4°C	15	T1	90.3°C	111.5°C	16	C201	70.9°C	93.2°C	17	C102	69.4°C	91.8°C	18	U1	69.3°C	91.6°C	19	U201	74.3°C	96.8°C
NO	Position	ROOM AMBIENT	HIGH AMBIENT																																																																																	
1	BD1	71.7°C	94.1°C																																																																																	
2	C14	69.7°C	92.2°C																																																																																	
3	LF2	67.8°C	89.8°C																																																																																	
4	Q1	71.3°C	94.1°C																																																																																	
5	D3	713.0°C	93.9°C																																																																																	
6	L2	70.1°C	92.4°C																																																																																	
7	L1	71.9°C	94.1°C																																																																																	
8	D2	71.0°C	93.5°C																																																																																	
9	TSW1	68.6°C	90.9°C																																																																																	
10	Q3	70.1°C	92.4°C																																																																																	
11	C5	67.3°C	89.8°C																																																																																	
12	C35	70.0°C	92.6°C																																																																																	
13	C37	70.0°C	92.6°C																																																																																	
14	D102	72.2°C	94.4°C																																																																																	
15	T1	90.3°C	111.5°C																																																																																	
16	C201	70.9°C	93.2°C																																																																																	
17	C102	69.4°C	91.8°C																																																																																	
18	U1	69.3°C	91.6°C																																																																																	
19	U201	74.3°C	96.8°C																																																																																	
2	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P : 305VAC/110VAC O/P : 100 % LOAD Ta= -40°C	TEST : OK																																																																																



250W Single Output LED Power Supply HLG-240H-Cseries

3	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 60 °C NO DAMAGE	I/P : 305 VAC O/P : FULL LOAD Ta= 60 °C HUMIDITY= 95 %R.H	TEST : OK
4	TEMPERATURE COEFFICIENT	± 0.03 %/°C (0~60°C)	I/P : 230 VAC O/P : FULL LOAD	± 0.022 %/°C (0~60°C)
5	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature : -45°C~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 5 CYCLE 5. Input/Output condition : STATIC		OK
6	THERMAL SHOCK TEST	1. Thermal shock Temperature : -45°C~ +65°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : 230VAC/Full Load AC ON/OFF TEST turn on 58sec ; turn off 2sec		OK
7	VIBRATION TEST	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (3) Sweep Time : 12min/sweep cycle (4) Acceleration : 5G (5) Test Time : 72min in each axis (X.Y.Z) (6) Ta : 25°C		TEST : OK
8	CAPACITOR LIFE CYCLE	HLG-240H-C1400 :SUPPOSE C102 IS THE MOST CRITICAL COMPONENT (2) I/P : 230VAC O/P : FULL LOAD Tc= 75 °C LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Tc= 75 °C LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Tc= 75 °C LIFE TIME		(1) 129737 HRS (2) 93030 HRS (3) 97466 HRS
9	MTBF	Conducted by Parts Stress Analysis Prediction 180K hrs min. MIL-HDBK-217F (25°C)		
10	Ongoing Reliability Test	I/P : 230VAC O/P : FULL LOAD TA=50°C Demonstration Mean Time Between Failure : 62,000 hours		

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	DANIEL GAO	SANFORD SU	VINCENT TSENG