



Test Report: PSPA-1000-12

1000W with PFC and Parallel Function

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Control Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test

■ RELIABILITY TEST


ENVIRONMENT TEST

DESIGN VERIFY TEST


OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE ADJUST RANGE	CH1: 11V~ 14V	I/P : 230 VAC I/P : 115 VAC O/P : MIN LOAD Ta : 25°C	10.571V~14.458V/230VAC 10.569V~14.458V/115VAC
2	OUTPUT VOLTAGE(Max) TOLERANCE	V1: 2%~ -2%	I/P: 90VAC /264VAC O/P:FULL/ MIN. LOAD Ta:25°C	V1: 0.83%~ 0%
3	LINE REGULATION (Max)	V1: 0.5%~ -0.5%	I/P: 90VAC~264VAC O/P:FULL LOAD Ta:25°C	V1: 0.166%~ -0.083%
4	LOAD REGULATION(Max)	V1: 2%~ -2%	I/P: 230VAC O/P:FULL ~MIN LOAD Ta:25°C	V1: 0.249%~ -0.166%
5	OVER/UNDERSHOOT TEST	< ±15%	I/P: 230VAC O/P:FULL LOAD Ta:25°C	< 15%
6	RIPPLE & NOISE(Max)	V1: 150mVp-p	I/P:230VAC O/P:FULL LOAD Ta:25°C	V1: 42.2mVp-p

high frequency :

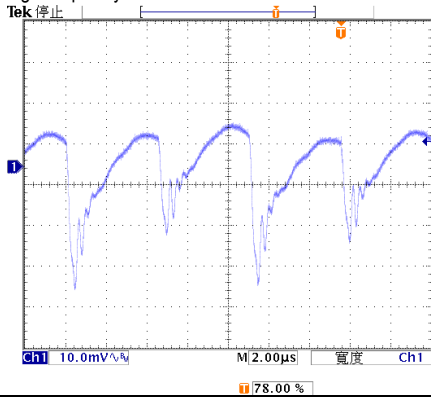


low frequency :

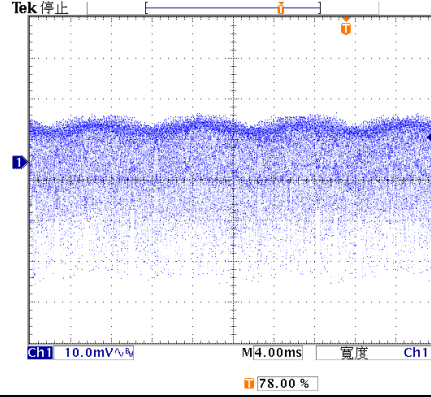

7	SET UP TIME(Max)	230VAC/1000ms 115VAC/1000ms	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	230VAC/ 347ms 115VAC/ 392ms
---	------------------	--------------------------------	--	--------------------------------


INPUT=230VAC/50HZ @ FULL LOAD

CH1 : Output Voltage CH2 : AC Input Voltage

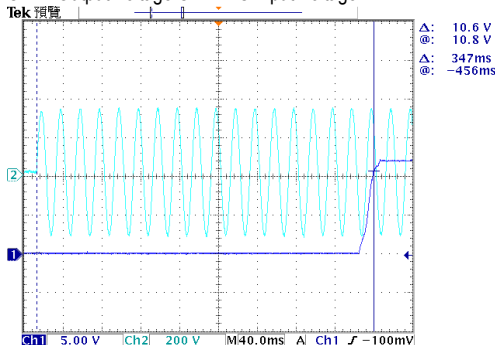

INPUT=115VAC/60HZ @ FULL LOAD


CH1 : Output Voltage CH2 : AC Input Voltage

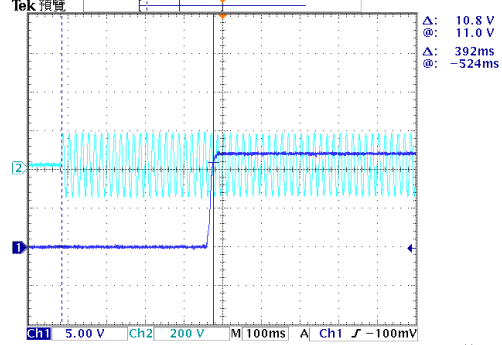

9 11月2017
16:12:06

9 11月2017
16:18:50


<p>8</p> <p>RISE TIME (Max)</p>	<p>230VAC/50ms 115VAC/50ms</p>	<p>I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C</p>	<p>230VAC/ 13 ms 115VAC/ 14 ms</p>
<p>INPUT=230VAC/50HZ @ FULL LOAD</p> <p>CH1 : Output Voltage</p>		<p>INPUT=115VAC/60HZ @ FULL LOAD</p> <p>CH1 : Output Voltage</p>	
<p>9</p> <p>HOLD UP TIME (Typ.)</p>	<p>230VAC/16ms 115VAC/20ms</p>	<p>I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C</p>	<p>230VAC/ 18.4 ms 115VAC/ 22.4ms</p>
<p>INPUT=230VAC/50HZ @ FULL LOAD</p> <p>CH1 : Output Voltage CH2 : AC Input Voltage</p>		<p>INPUT=115VAC/60HZ @ FULL LOAD</p> <p>CH1 : Output Voltage CH2 : AC Input Voltage</p>	
<p>10</p> <p>DYNAMIC LOAD</p>	<p>V1: 1200mVp-p</p>	<p>I/P: 230VAC O/P: (1)FULL /50% LOAD 50%DUTY / 120HZ (2)FULL /50% LOAD 50%DUTY / 1KHZ Ta:25°C</p>	<p>178mVp-p 172mVp-p</p>
<p>FULL /50% LOAD 50%DUTY / 120HZ</p>		<p>FULL /50% LOAD 50%DUTY / 1KHZ</p>	

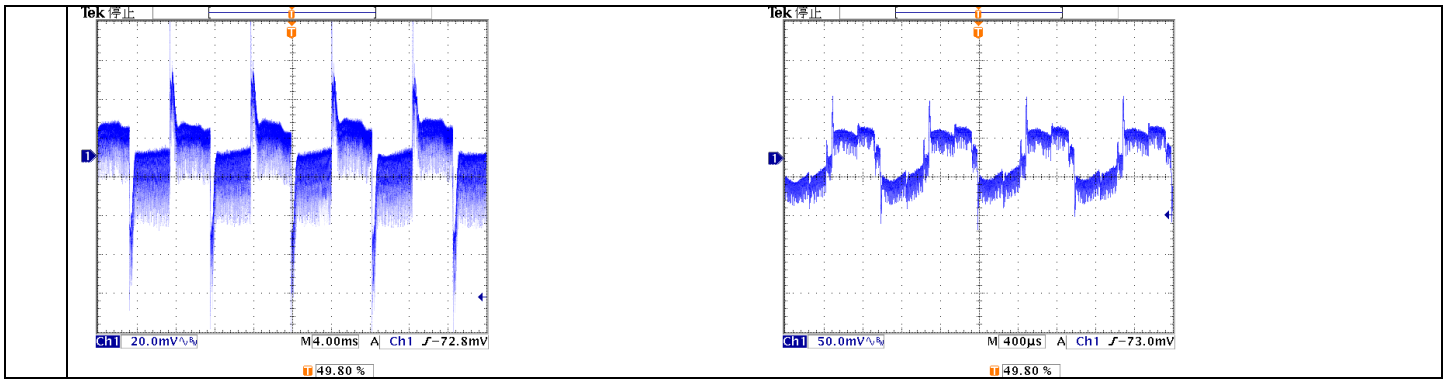

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	90VAC~264VAC	I/P: TESTING O/P: FULL LOAD Ta: 25°C	58 V~264V
			I/P: LOW-LINE-3V=87 V HIGH-LINE+15%=300 V O/P: FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec OFF: 30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	TEST: OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P: 90VAC ~264 VAC O/P: FULL~MIN LOAD Ta: 25°C	TEST: OK
3	INPUT CURRENT (Typ.)	230V/ 5A 115V/ 8.5A	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	I =4.66A/ 230VAC I =7.89A/ 115VAC
4	LEAKAGE CURRENT	< 0.5 mA / 240 VAC	I/P : 240 VAC O/P : Min LOAD Ta : 25°C	L-FG : 0.39 mA N-FG : 0.39 mA
5	POWER FACTOR (Typ.)	0.95/ 230VAC 0.99/115VAC	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	PF=0.974/230VAC PF=0.997/115VAC

P.F vs LOAD

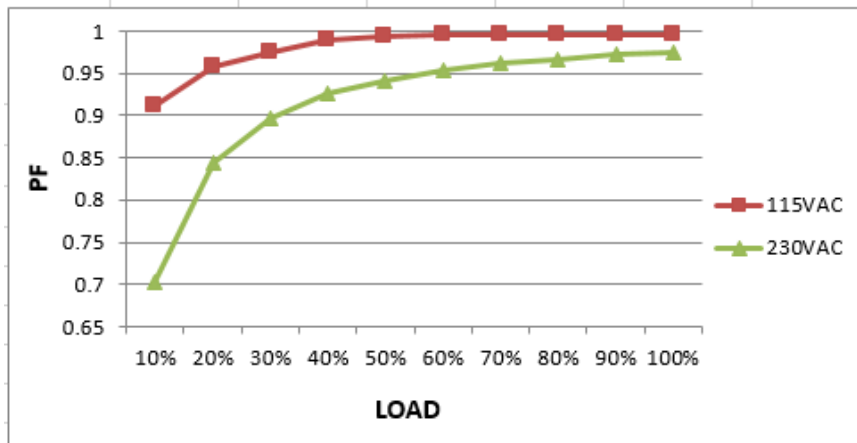


6	EFFICIENCY(Typ.)	92%	I/P:230 VAC O/P:FULL LOAD Ta:25°C	92.45%																																	
<p>EFFICIENCY vs LOAD</p> <table border="1"> <caption>Efficiency vs Load Data</caption> <thead> <tr> <th>LOAD (%)</th> <th>115VAC Efficiency (%)</th> <th>230VAC Efficiency (%)</th> </tr> </thead> <tbody> <tr><td>10%</td><td>84.5</td><td>85.0</td></tr> <tr><td>20%</td><td>89.5</td><td>90.5</td></tr> <tr><td>30%</td><td>91.0</td><td>92.5</td></tr> <tr><td>40%</td><td>91.5</td><td>93.5</td></tr> <tr><td>50%</td><td>91.8</td><td>94.0</td></tr> <tr><td>60%</td><td>91.5</td><td>93.8</td></tr> <tr><td>70%</td><td>91.2</td><td>93.5</td></tr> <tr><td>80%</td><td>90.8</td><td>93.2</td></tr> <tr><td>90%</td><td>90.5</td><td>93.0</td></tr> <tr><td>100%</td><td>90.2</td><td>92.8</td></tr> </tbody> </table>					LOAD (%)	115VAC Efficiency (%)	230VAC Efficiency (%)	10%	84.5	85.0	20%	89.5	90.5	30%	91.0	92.5	40%	91.5	93.5	50%	91.8	94.0	60%	91.5	93.8	70%	91.2	93.5	80%	90.8	93.2	90%	90.5	93.0	100%	90.2	92.8
LOAD (%)	115VAC Efficiency (%)	230VAC Efficiency (%)																																			
10%	84.5	85.0																																			
20%	89.5	90.5																																			
30%	91.0	92.5																																			
40%	91.5	93.5																																			
50%	91.8	94.0																																			
60%	91.5	93.8																																			
70%	91.2	93.5																																			
80%	90.8	93.2																																			
90%	90.5	93.0																																			
100%	90.2	92.8																																			
7	INRUSH CURRENT(Typ.)	230V/40A 115V/20A COLD START	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	I =27.1A/ 230VAC I =16.2A/ 115VAC T50:1740us/230V																																	
<p>INPUT=230VAC/50HZ @ FULL LOAD INPUT=115VAC/ 60HZ @ FULL LOAD</p> <p>CH2 : AC Input Voltage CH4 : Input current CH2 : AC Input Voltage CH4 : Input current</p>																																					


PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	105%~ 135% Protection type : Constant current limiting, recovers automatically after fault condition is removed	I/P: 264VAC I/P: 230VAC I/P: 115VAC O/P:TESTING Ta:25°C	118.85%/ 264VAC 118.79%/ 230VAC 118.86%/115VAC PROTECTION TYPE : Constant current limiting, recovers automatically after fault condition is removed
2	OVER VOLTAGE PROTECTION	14.5V~16.5V Protection type : Shut down o/p voltage, re-power on to recover	I/P: 264VAC I/P: 230VAC I/P: 90VAC O/P:MIN LOAD Ta:25°C	15.390V/ 264VAC 15.391V/ 230VAC 15.344V/ 90VAC PROTECTION TYPE : Shut down o/p voltage, re-power on to recover

3	OVER TEMPERATURE PROTECTION	Protection type : Shut down o/p voltage, re-power on to recover	I/P: 264VAC I/P: 90VAC O/P: FULL LOAD	O.T.P. Active Protection type : OK Shut down o/p voltage, re-power on to recover
4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 264VAC I/P: 90VAC O/P: FULL LOAD Ta: 25°C	NO DAMAGE PROTECTION TYPE : OK Constant current limiting, recovers automatically after fault condition is removed

CONTROL FUNCTION TEST

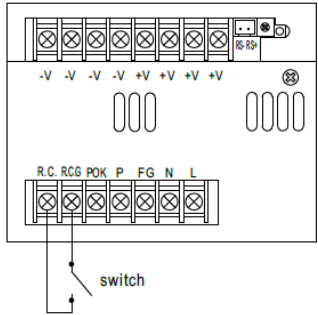NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT						
1	CURRENT SHARING	< 10%	I/P : 230 VAC O/P : 90%/50% LOAD Ta : 25°C	O/P : 90% PSU1 : 74.11A PSU2 : 72.73 A PSU3 : 72.5A PSU4 : 73.64A O/P : 50% PSU1 : 41.08 A PSU2 : 41.08 A PSU3 : 38.79A PSU4 : 41.4A						
2	REMOTE SENSE	S+ / S- >0.5V	I/P: 230 VAC O/P: FULL LOAD Ta: 25°C	> 0.5V						
3	REMOTE ON-OFF CONTROL	<p>※ The power supply can be turned ON-OFF individually or along with other units by using the "Remote ON-OFF" function.</p>  <table border="1" data-bbox="997 1176 1420 1288"> <thead> <tr> <th>Between R.C. and R.C.G</th> <th>Power Supply Status</th> </tr> </thead> <tbody> <tr> <td>Switch Short</td> <td>ON</td> </tr> <tr> <td>Switch Open</td> <td>OFF</td> </tr> </tbody> </table> <p>I/P: 230 VAC O/P: NO LOAD Ta: 25°C TEST RESULT : OK</p>			Between R.C. and R.C.G	Power Supply Status	Switch Short	ON	Switch Open	OFF
Between R.C. and R.C.G	Power Supply Status									
Switch Short	ON									
Switch Open	OFF									

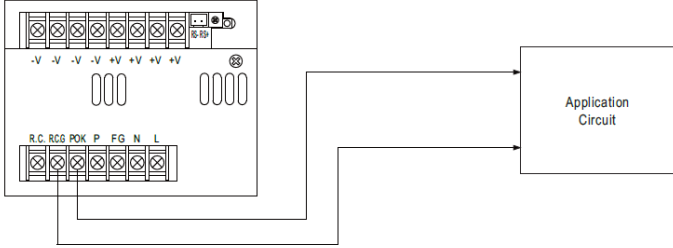4	POK SIGNAL	<p>The TTL signal out, PSU turn on = 2.4 ~ 5V ; PSU turn off = 0 ~ 0.4V. Please refer to the Function Manual.</p> <p>※ POK signal indicates the output status of the power supply. It can operate in two ways : One is sinking current from external TTL signal ; the other is sending out a TTL voltage signal.</p> <p>◎ Sinking current from external TTL signal: The maximum sink current is 10mA and the maximum external voltage is 5.6V.</p>  <p>I/P: 230 VAC O/P: FULL LOAD Ta: 25°C</p> <p>TEST RESULT :</p> <table border="1" style="width: 100%;"> <tr> <td></td> <td style="text-align: center;">PSU TURN ON</td> <td style="text-align: center;">PSU TURN OFF</td> </tr> <tr> <td style="text-align: center;">P OK</td> <td style="text-align: center;">4.34V</td> <td style="text-align: center;">0.04V</td> </tr> </table>		PSU TURN ON	PSU TURN OFF	P OK	4.34V	0.04V
	PSU TURN ON	PSU TURN OFF						
P OK	4.34V	0.04V						

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor (D to S) or (C to E) Peak Voltage	Q911 Rated : 26A / 600V	I/P: High-Line +3V = 303V I/P: Low-Line -3V = 197V AC ON/OFF VDS: O/P: (1) Full Load (2) Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7) 0% → 400% Load. Ta: 25°C	303V 197V VDS: VDS: (1) 519V (1) 432 V (2) 511V (2) 428V (3) 434 V (3) 380V (4) 503V (4) 380V (5) 503V (5) 380V (6) 498 V (6) 380 V (7) 465V (7) 432V
2	P.F.C Transistor (D to S) or (C to E) Peak Voltage	Q1 Rated: 34A / 650V	I/P: High-Line +3V = 303 V I/P: Low-Line -3V = 197V AC ON/OFF O/P: (1) Full Load (2) Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7) 0% → 400% Load. Ta: 25°C	303V 197V VDS: VDS: (1) 430V (1) 438V (2) 430V (2) 418V (3) 430V (3) 418V / (4) 430V (4) 422V (5) 434V (5) 422V (6) 437V (6) 418V (7) 430V (7) 422V

3	P.F.C DIODE	D6 Rated: 6A / 600V	I/P:High-Line +3V =303 V I/P:Low-Line -3V = 197V AC ON/OFF O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (4)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz Ta:25°C	303V (1) 369V (2) 373V (3) 370V (4) 378V	197V (1) 386V (2) 386V (3) 382V (4) 386V	
4	Diode Peak Voltage	Q503 Rated: 100A / 40V Q507 Rated: 100A / 40V	I/P:High-Line +3V =303 V AC ON/OFF O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4)Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8).NO LOAD	Q503: VDS: (1)33.1V (2)17.5V (3)32.7V (4)33.5V (5)33.5V (6)36.3V (7)31.5V (8)31.5V	Q507: VDS: (1)33.9V (2)14.6V (3)31.5V (4)31.9V (5)31.1V (6)31.1 V (7)31.5V (8)31.5V	
5	Control IC Voltage Test	PWM IC U900 8.85 V ~ 16 V PFC IC U1 : 12.9 V ~ 25 V O/P SR U502 Rated: 8V~ 24V	I/P:High-Line +3V =303 V AC ON/OFF O/P(1)FULL LOAD (2) Output Short (3)O.L.P (4)O.V.P. (5)NO LOAD VRMIN (LOW LINE) Ta:25°C	U900 (1) 13.6V (2) 13.6V (3) 13.6V (4) 13.6V (5) 13.4V	U1 (1) 15.3V (2) 15.7V (3) 15.5V (4) 15V (5) 14.8V	U502 (1)12.3V (2)12.3V (3)12.2V (4)12.3V (5)12V
6	TOP SWITCHING STAND BY POWER	U971 Rated : 1.8 A / 700V	I/P:High-Line +3V =303 V I/P:Low-Line -3V =197 V AC ON/OFF O/P: (1)Full Load (2)Remote On/Off Ta:25°C	303V (1) 512V (2) 524V	197V (1) 463 V (2) 483V	

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 3KVAC/min I/P-FG :2KVAC/min O/P-FG:0.5KVAC/min	I/P-O/P: 3.6 KVAC/min I/P-FG: 2.4 KVAC/min O/P-FG:0.6 KVAC/min Ta:25°C	I/P-O/P:6.28mA I/P-FG:5.26mA O/P-FG:5.13m A NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100MΩ I/P-FG: 500VDC>100MΩ O/P-FG:500VDC>100MΩ	I/P-O/P: 500 VDC I/P-FG: 500 VDC O/P-FG: 500 VDC Ta:25°C	I/P-O/P: 7.87GΩ I/P-FG: 8.37GΩ O/P-FG: 18.7GΩ NO DAMAGE
3	GROUNDING CONTINUITY	FG(PE) TO CHASSIS OR TRACE < 100 mΩ	40A / 2min Ta:25°C	15mΩ

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS A	I/P:230VAC/50HZ O/P:FULL LOAD Ta:25°C	PASS
2	CONDUCTION	EN55032 CLASS B	I/P : 230 VAC (50HZ) O/P : FULL/50% LOAD Ta : 25°C	PASS Test by certified Lab
3	RADIATION	EN55032 CLASS B	I/P : 230 VAC (50HZ) O/P : FULL LOAD Ta : 25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 <u>INDUSTRY</u> AIR: 8KV / Contact: 4KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
5	E.F.T	EN61000-4-4 <u>INDUSTRY</u> INPUT : 2KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
6	SURGE	IEC61000-4-5 <u>INDUSTRY</u> L-N : 2KV L,N-PE : 4KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
7	Test by certified Lab & Test Report Prepare			

■ **RELIABILITY TEST**

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	TEMPERATURE RISE TEST	MODEL : PSPA-1000-12 1. ROOM AMBIENT BURN-IN : 14HRS I/P : 230VAC O/P : FULL LOAD 2. HIGH AMBIENT BURN-IN : 2HRS I/P : 230VAC O/P : FULL LOAD		

		NO	Position	ROOM AMBIENT Ta= 25°C	HIGH AMBIENT Ta= 50°C
		1	BD1	64.3°C	88.6°C
		2	R5	43.7°C	67.7°C
		3	Q1	46.4°C	72.9°C
		4	D6	61.3°C	86.1°C
		5	C5	41.1°C	64.3°C
		6	U971	46.1°C	72.1°C
		7	RY1	46.3°C	70.8°C
		8	Q405	39.7°C	64.7°C
		9	C406	28.3°C	54.1°C
		10	TSW4	38.3°C	63.6°C
		11	RTH3	38.8°C	63.9°C
		12	L1	51.0°C	73.1°C
		13	T951	39.4°C	64.5°C
		14	C1	33.3°C	59.5°C
		15	LF2	37.7°C	63.9°C
		16	C2	33.3°C	58.5°C
		17	LF3	39.5°C	64.0°C
		18	T1-1	73.7°C	100.4°C
		19	T1-2	71.2°C	99.0°C
		20	T2-1	61.6°C	88.6°C
		21	T2-2	63.4°C	91.6°C
		22	L900	59.8°C	83.1°C
		23	Q910	51.6°C	78.9°C
		24	C933	48.1°C	72.4°C
		25	C935	46.2°C	70.4°C
		26	Q911	59.5°C	88.5°C
		27	C910	40.7°C	65.7°C
		28	C106	46.4°C	72.2°C
		29	C116	39.9°C	65.3°C
		30	C906	39.0°C	62.8°C
		31	C112	50.3°C	76.3°C
		32	U551	54.7°C	79.9°C
		33	U501	75.0°C	103.2°C
		34	Q505	83.7°C	114.5°C
		35	Q501	66.1°C	92.8°C
		36	U503	60.4°C	108.9°C
		37	Q503	72.7°C	100.9°C
		38	Q507	84.5°C	114.1°C
		39	U1	40.6°C	66.0°C
		40	C11	40.2°C	64.8°C
		41	D981	47.4°C	72.7°C
		42	U900	43.5°C	69.0°C
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)		I/P : 230 VAC O/P : 121 % LOAD Ta : 25°C	TEST : OK
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR		I/P : 264VAC/200VAC O/P : 100 % LOAD Ta= -25°C	TEST : OK



4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 50°C NO DAMAGE	I/P : 272 VAC O/P : FULL LOAD Ta= 50 °C HUMIDITY= 95 %R.H	TEST : OK
5	TEMPERATURE COEFFICIENT	± 0.03 %/°C(0~50°C)	I/P : 230 VAC O/P : FULL LOAD	± 0 %/°C(0~50°C)
6	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature : -45°C~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : STATIC		OK
7	THERMAL SHOCK TEST	1. Thermal shock Temperature : -25°C~ +55°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 16 CYCLE 5. Input/Output condition : 15cycle:230V/ FULL LOAD AC ON 3sec/AC OFF 1sec TEST 1cycle:230V/ FULL LOAD Burn In Test		OK
8	VIBRATION TEST	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (3) Sweep Time : 12min/sweep cycle (4) Acceleration : 2G (5) Test Time : 60min in each axis (X.Y.Z) (6) Ta : 25°C		TEST : OK
9	CAPACITOR LIFE CYCLE	PSPA-1000-12 SUPPOSE C106 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Ta= °C LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta= °C LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta= °C LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta= °C LIFE TIME		(1) 350803HRS (2) 58648HRS (3) 182594HRS (4) 471820HRS
10	MTBF	Conducted by Parts Stress Analysis Prediction 807.1K hrs min. Telcordia SR-332 (Bellcore) ; 94.9K hrs min. MIL-HDBK-217F (25)		
11	DMTBF/Accelerated Life Test	Demonstration Mean Time Between Failure (Expected Life): Above 50,000 hours @ TA 50°C		

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	DANIEL GAO	SANFORD SU	VINCENT ZENG

12.10.30 A50-F031